

AGV Battery Systems



Motive Power Systems



Telecom/IT Battery Systems



Railway Battery Systems



Power Supply



Standby



net.power

Sealed lead-acid battery

Product features

Customer benefits

- Electrolyte fixed in glass mat
= **Reduced maintenance (no water refilling)**
- Protection against flashback and central degassing integrated in the lid
= **Enhanced protection against risk of explosion**
- Standardised dimensions
= **Compatible with standard 19" and 23" cabinets**
- Composite terminal / system connector
= **No corrosion**
= **Prevents short-circuits even during installation**

Main applications:



IT/Telecom



Security lighting



UPS



Type overview

Capacities, dimensions and weights

Type	C ₁₀ /1.80 V Ah	C ₅ /1.75 V Ah	C ₃ /1.70 V Ah	C ₁ /1.70 V Ah	C _{1/2} /1.65 V Ah	C _{1/6} /1.60 V Ah	Weight kg	Length L mm	Width W mm	Height H mm	Fig.
net.power 12 V 92	85.0	80.9	75.3	61.0	54.1	38.3	34.0	393	105	273	A
net.power 12 V 100	100.0	96.5	89.7	73.9	64.5	45.7	42.8	558	125	230	B
net.power 12 V 130	130.0	126.0	117.0	96.1	84.0	59.3	59.3	558	125	315	B
net.power 12 V 150	150.0	145.0	135.0	111.0	97.0	68.5	61.9	558	125	315	B

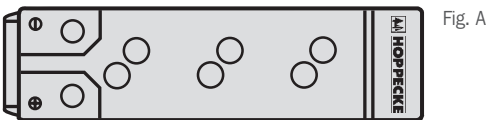
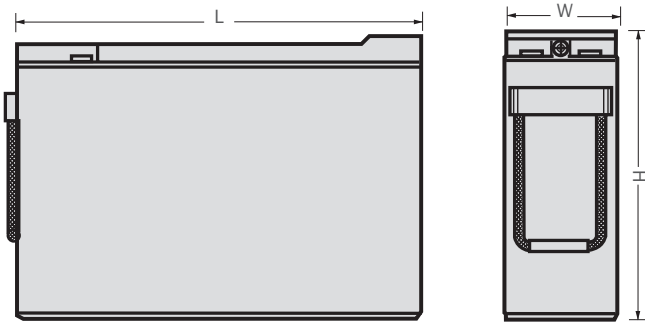


Fig. A

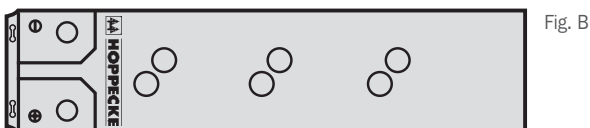


Fig. B



Design life: > 12 years (in accordance to EUROBAT)

HOPPECKE Batterien GmbH & Co. KG

P.O. Box 1140 · D-59914 Brilon
Bontkirchener Straße 1 · D-59929 Brilon-Hoppecke

Phone: + 49 (0) 29 63 61-0

Email: info@hoppecke.com

Fax: + 49 (0) 29 63 61-2 70

Internet: www.hoppecke.com